

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : H01M 8/02, 8/24</p>	<p>A1</p>	<p>(11) International Publication Number: WO 95/16287 (43) International Publication Date: 15 June 1995 (15.06.95)</p>
<p>(21) International Application Number: PCT/CA94/00673 (22) International Filing Date: 9 December 1994 (09.12.94) (30) Priority Data: 165,076 10 December 1993 (10.12.93) US (71) Applicant: BALLARD POWER SYSTEMS INC. [CA/CA]; Unit 107, 980 West 1st Street, North Vancouver, British Columbia V7P 3N4 (CA). (72) Inventors: WILKINSON, David, P.; 1391 Coleman Street, North Vancouver, British Columbia V7R 1W4 (CA). LA- MONT, Gordon, J.; 37 West 26th Avenue, Vancouver, British Columbia V5Y 2J5 (CA). VOSS, Henry, H.; 1163 Duchess Avenue, West Vancouver, British Columbia V7T 1H1 (CA). SCHWAB, Clemens; Diamanstrasse 15, D- 88048 Friedrichshafen (DE). (74) Agent: DE KOCK, Elbie, R.; Russell Reyneke, Suite 1100, 938 Howe Street, Vancouver, British Columbia V6Z 1N9 (CA).</p>		<p>(81) Designated States: AU, CA, JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the</i> <i>claims and to be republished in the event of the receipt of</i> <i>amendments.</i></p>

(54) Title: **EMBOSSSED FLUID FLOW FIELD PLATE FOR ELECTROCHEMICAL FUEL CELLS**

(57) Abstract

An embossed fluid flow field plate (100) for electrochemical cells comprises a compressible, electrically conductive sheet (101). The sheet has two oppositely facing major surfaces. At least one of the major surfaces (102) has an embossed surface which has a fluid inlet (116) formed therein. The embossed surface has at least one open-faced channel embossed therein extending from the fluid inlet for conducting pressurized fluid introduced at the fluid inlet. The compressible, electrically conductive sheet preferably comprises graphite foil.

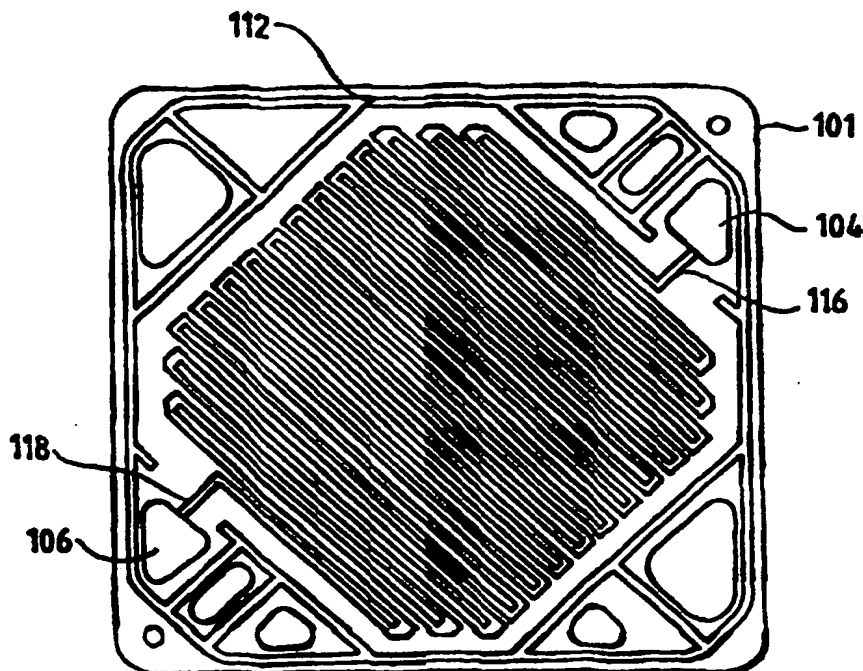

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

- 1 -

**EMBOSSSED FLUID FLOW FIELD PLATE
FOR ELECTROCHEMICAL FUEL CELLS**

Field Of The Invention

The present invention relates to electrochemical cells. More particularly, the present invention relates to the embossing of compressible, electrically conductive sheets for use as fluid flow field or separator plates for electrochemical cells, as well as the method of fabricating such embossed fluid flow field or separator plates. In addition, the present invention relates to embossed coolant flow field plates for electrochemical cells.

Background Of The Invention

Electrochemical fuel cells convert fuel and oxidant to electricity and reaction product. In electrochemical fuel cells employing hydrogen as the fuel and oxygen as the oxidant, the reaction product is water. Such fuel cells generally employ a membrane electrode assembly ("MEA") consisting of a solid polymer electrolyte or ion exchange membrane disposed between two electrodes formed of porous, electrically conductive sheet material, typically carbon fiber paper. The MEA contains a layer of catalyst, typically in the form of finely comminuted platinum, at each membrane/electrode interface to induce the desired electrochemical reaction. The electrodes are electrically coupled to provide a path for conducting electrons between the electrodes through an external load.

- 2 -

At the anode, the fuel permeates the porous electrode material and reacts at the catalyst layer to form cations, which migrate through the membrane to the cathode. At the cathode, the oxygen-containing gas supply reacts at the catalyst layer to form anions. The anions formed at the cathode react with the cations to complete the electrochemical reaction and form a reaction product.

10 In electrochemical fuel cells employing hydrogen as the fuel and oxygen-containing air (or substantially pure oxygen) as the oxidant, the catalyzed reaction at the anode produces hydrogen cations (protons) from the fuel supply. The ion
15 exchange membrane facilitates the migration of hydrogen ions from the anode to the cathode. In addition to conducting hydrogen ions, the membrane isolates the hydrogen-containing fuel stream from the oxygen-containing oxidant stream. At the
20 cathode, oxygen reacts at the catalyst layer to form anions. The anions formed at the cathode react with the hydrogen ions that have crossed the membrane to complete the electrochemical reaction and form liquid water as the reaction product.

25 In conventional fuel cells, the MEA is interposed between two fluid-impermeable, electrically conductive plates, commonly referred to as the anode and the cathode plates, respectively. The plates serve as current
30 collectors, provide structural support for the porous, electrically conductive electrodes, provide means for carrying the fuel and oxidant to the anode and cathode, respectively, and provide means for removing water formed during operation of the

- 3 -

fuel cell. When the channels are formed in the anode and cathode plates, the plates are normally referred to as fluid flow field plates. When the anode and cathode plates overlay channels formed in the anode and cathode porous material, the plates
5 are normally referred to as separator plates.

Reactant feed manifolds are generally formed in the anode and cathode plates, as well as in the MEA, to direct the fuel (typically substantially
10 pure hydrogen or hydrogen-containing reformat from the conversion of hydrocarbons such as methanol or natural gas) to the anode and the oxidant (typically substantially pure oxygen or oxygen-containing gas) to the cathode via the channels
15 formed in either the fluid flow field plates or the electrodes themselves. Exhaust manifolds are also generally formed in the anode and cathode plates, as well as the MEA, to direct unreacted fuel and oxidant, as well as water accumulated at the
20 cathode, from the fuel cell.

Multiple fuel cell assemblies comprising two or more anode plate/MEA/cathode plate combinations, referred to as a fuel cell stack, can be connected together in series (or in parallel) to increase the
25 overall power output as required. In such stack arrangements, the cells are most often connected in series, wherein one side of a given fluid flow field or separator plate is the anode plate for one cell, the other side of the plate is the cathode
30 plate for the adjacent cell, and so on.

Perfluorosulfonic ion exchange membranes, such as those sold by DuPont under its Nafion trade designation, have been used effectively in electrochemical fuel cells. Fuel cells employing

- 4 -

Nafion-type cation exchange membranes require accumulated water to be removed from the cathode (oxidant) side, both as a result of the water transported across the membrane with cations and product water formed at the cathode from the electrochemical reaction of hydrogen cations with oxygen. An experimental perfluorosulfonic ion exchange membrane, sold by Dow under the trade designation XUS 13204.10, appears to have significantly less water transported with hydrogen cations across the membrane. Fuel cells employing the Dow experimental membrane thus tend to accumulate less water on the cathode (oxidant) side, as the accumulated water at the cathode is essentially limited to product water formed from the electrochemical reaction of hydrogen and oxygen.

A typical prior art fluid flow field plate, exemplified by General Electric Company and Hamilton Standard in a 1984 report for the U.S. Department of Energy (LANL No. 9-X53-D6272-1), included a plurality of parallel open-faced fluid flow channels formed in a major surface of a rigid, electrically conductive plate. The parallel channels extended between an inlet header and an outlet header formed in the plate. The parallel channels were typically rectangular in cross-section, and about 0.03 inches deep and about 0.03 inches wide. The inlet header was connected to an opening in the plate through which a pressurized reactant (fuel or oxidant) stream is supplied. The outlet header was connected to an opening in the plate through which the exhaust stream is discharged from the cell. In operation, the

- 5 -

reactant stream ran from the inlet to the inlet header and then to the parallel channels from which reactant from the stream diffused through the porous electrode material to the electrocatalytically active region of the MEA. The stream then flowed to the outlet header and then to the outlet from which it was exhausted from the fuel cell.

Watkins U.S. Patent Nos. 4,988,583 and 5,108,849 issued January 29, 1991 and April 28, 1992, respectively, describe fluid flow field plates which include a fluid supply opening and a fluid exhaust opening formed in the plate surface. Continuous open-faced fluid flow channels formed in the surface of the plate traverse the central area of the plate surface in a plurality of passes, that is, in a serpentine manner. Each channel has a fluid inlet at one end and a fluid outlet at the other end. The fluid inlet and outlet of each channel are directly connected to the fluid supply opening and fluid exhaust opening, respectively. The continuous channel design promotes the forced movement of water through each channel before the water can coalesce, thereby promoting uniform reactant flow across the surface of the cathode.

U.S. patent application Serial No. 07/975,791 filed November 13, 1992, incorporated by reference herein in its entirety, describes and claims a fluid flow field plate for electrochemical fuel cells in which the inlet and outlet flow channels are discontinuous. The employment of discontinuous flow channels, as described in U.S. patent application Serial No. 07/975,791, has several advantages:

- 6 -

1. Improved performance, particularly at higher reactant inlet pressures, resulting from (a) more effective water removal due to better access of the reactant stream to the electrocatalytically active region at the membrane/electrode interface, (b) more uniform current density due to more even distribution of the reactant stream across the electrocatalytically active area of the fuel cell and the avoidance of water pooling in the flow channels, and (c) lower flow field plate/electrode contact resistance due to the use of a decreased amount of the flow field plate surface to accommodate the flow channels.
2. Improved fuel cell lifetime resulting from (a) the ability to reduce the compressive load on the electrodes due to decreased contact resistance between the flow field plates and the electrodes, and (b) more uniform reactant gas relative humidity due to more even distribution of the reactant stream across the electrocatalytically active area of the fuel cell.
3. Reduced manufacturing costs resulting from (a) the ability to reduce the amount of graphite plate milling required for continuous channels and to relax the tolerances required for the channel dimensions, (b) a wider range of materials and fabrication techniques permitted with the discontinuous flow

- 7 -

channel design, such as stamping of flow field stencils, to be employed, particularly the use of thinner electrically conductive sheet materials, as the discontinuous channels do not require the thickness and rigidity of the electrically conductive plates in which continuous, serpentine flow channels are formed, and (c) the ability to employ a stenciled graphite foil laminate, thereby reducing the weight (and cost) associated with rigid graphite flow field plates.

Conventional methods of fabricating fluid flow field plates require the engraving or milling of flow channels into the surface of the rigid, resin-impregnated graphite plates. These methods of fabrication place significant restrictions on the minimum achievable cell thickness due to the machining process, plate permeability, and required mechanical properties. For example, the minimum practical thickness for a double-sided flow field plate is approximately .075 inches.

The conventional resin-impregnated graphite plates are expensive, both in raw material costs and in machining costs. The machining of channels and the like into the graphite plate surfaces causes significant tool wear and requires significant processing times.

As described and claimed in U.S. patent application Serial No. 08/024,660 (the "'660 application"), incorporated herein in its entirety, fluid flow field plates may also be fabricated by a lamination process. Specifically, the '660 application discloses and claims a laminated fluid

- 8 -

flow field assembly for an electrochemical fuel cell which comprises:

5 a separator layer formed of electrically conductive, substantially fluid impermeable sheet material, the separator layer having two oppositely facing major surfaces;

10 a stencil layer formed of electrically conductive sheet material, the stencil layer having two oppositely facing major surfaces, the stencil layer having a fluid inlet formed therein and at least one opening formed therein extending between the major surfaces thereof, the at least one opening in fluid communication with the fluid inlet; and

15 means for consolidating the separator layer and the stencil layer along one of their respective major surfaces.

In operation, the separator layer and the stencil layer cooperate to form at least one open-
20 faced channel for conducting pressurized fluid introduced at the fluid inlet. The separator layer and the stencil layer are consolidated by compression, preferably in combination with an electrically conductive adhesive. The laminated
25 fluid flow field assembly thus comprises two layers which must be properly positioned and aligned prior to consolidation.

It is often difficult and time consuming to properly position and align the separator and
30 stencil layers of a laminated fluid flow field assembly. The two-layer laminated fluid flow field assembly also adds both volume and weight to the fuel cell, as compared, for example, to a one-layer fluid flow field assembly. Thus, as with

- 9 -

conventionally fabricated fluid flow field plates, laminated fluid flow field assemblies restrict the extent to which cell thickness can be reduced because of the minimum thickness each plate or
5 layer must possess to permit milling or engraving (in the case of graphite plates) or die-cutting (in the case of stencil layers or laminated assemblies).

Accordingly, it is an object of the present
10 invention to provide an improved fluid flow field plate for use in electrochemical cells that is reduced in weight and volume, and that is simpler and less expensive to manufacture than conventional fluid flow field plates and laminated fluid flow
15 field assemblies.

Another object of the present invention is to provide an improved fluid flow field plate for use in electrochemical cells that achieves a higher power density at a lower cost than conventional
20 fluid flow field plates and laminated fluid flow field assemblies.

Still another object of the invention is to provide fluid flow field plates having improved sealing capabilities because of the presence of
25 sealant grooves embossed in the surface of the plate.

A further object of the present invention is to provide improved coolant flow field plates for use in electrochemical cells.

30 A still further object of the invention is to provide an improved method of fabricating an embossed fluid flow field plate for use in electrochemical cells.

- 10 -

Summary Of The Invention

The above and other objects are achieved by an embossed fluid flow field plate for use in conjunction with an electrochemical cell. The plate comprises a sheet of compressible, electrically conductive material. The sheet has two oppositely facing major surfaces, at least one of the major surfaces comprising an embossed surface. The embossed surface has a fluid inlet formed therein and further has at least one open-faced inlet channel embossed therein. The at least one embossed inlet channel extends from the fluid inlet. In operation, the at least one embossed inlet channel conducts pressurized fluid introduced at the fluid inlet.

In the preferred embossed fluid flow field plate, the embossed surface has an inlet opening formed therein. The inlet opening extends between the major surfaces of the sheet and is in fluid communication with the fluid inlet. The embossed surface preferably has a fluid outlet formed therein, the embossed surface further having at least one open-faced outlet channel embossed therein, the at least one embossed outlet channel extending from the fluid outlet, whereby the at least one embossed outlet channel conducts pressurized fluid to the fluid outlet.

In one preferred embodiment, the at least one embossed inlet channel extends into the at least one embossed outlet channel to form at least one embossed continuous channel, whereby pressurized fluid introduced at the fluid inlet is conducted to the fluid outlet along the at least one inlet channel and the at least one outlet channel. In

- 11 -

this embodiment, the at least one embossed continuous channel forms a serpentine pattern on the embossed surface.

5 In another preferred embodiment, the at least one embossed inlet channel is discontinuous with respect to the at least one embossed outlet channel. In this embodiment, the at least one embossed outlet channel preferably comprises at least two embossed outlet channels, and the at
10 least one embossed inlet channel and the at least two embossed outlet channels are preferably interdigitated, whereby each adjacent pair of embossed outlet channels has an embossed inlet channel disposed therebetween along a substantial
15 portion thereof.

In the preferred embossed fluid flow field plate, the compressible, electrically conductive sheet preferably comprises graphite foil. In
20 another preferred embodiment, the compressible, electrically conductive sheet is a laminated assembly comprising at least two layers of graphite foil and a metal foil layer interposed between each adjacent pair of graphite foil layers.

In still another preferred embodiment, the
25 embossed surface further has at least one open-faced sealant channel embossed therein. The at least one embossed sealant channel circumscribes the central portion of the embossed surface and accommodates a substantially fluid impermeable
30 sealant material therein, whereby the sealant material fluidly isolates the central portion from the atmosphere surrounding the plate.

The above and other objects are also achieved by an electrochemical fuel cell for converting a

- 12 -

fluid fuel stream and a fluid oxidant stream to a reaction product stream and electrical energy. The fuel cell comprises:

- 5 first and second embossed fluid flow field plates, each of the plates comprising:
 - 10 a separator sheet formed of compressible, electrically conductive material, the separator sheet having two oppositely facing major surfaces, at least one of the major surfaces comprising an embossed surface, the embossed surface having a fluid inlet formed therein and further having at least one open-faced inlet channel
 - 15 embossed therein, the at least one embossed inlet channel extending from the fluid inlet, whereby the at least one embossed inlet channel conducts
 - 20 pressurized fluid introduced at the fluid inlet;
- 25 a membrane electrode assembly interposed between the first and second embossed fluid flow field plates, the membrane electrode assembly comprising:
 - 30 an anode having a catalyst associated therewith to render a region of the anode electrocatalytically active wherein cations are produced from the fluid fuel stream;
 - a cathode having a catalyst associated therewith to render a region of the cathode electrocatalytically active wherein an electrochemical reaction between the cations and the

- 13 -

fluid oxidant stream is promoted;

5 a solid polymer ion exchange
membrane disposed between the anode
assembly and the cathode assembly, the
membrane facilitating the migration of
cations from the anode assembly to the
cathode assembly and isolating the fluid
fuel stream from the fluid oxidant
stream;

10 an electrical path for conducting
electrons formed at the anode assembly to
the cathode assembly.

The preferred fuel cell further comprises a
coolant flow field plate adjacent one of the
15 separator sheets on the side facing away from the
membrane. The coolant flow field plate comprises:

a sheet of compressible, electrically
conductive, substantially fluid impermeable
material, the sheet having two oppositely
20 facing major surfaces, at least one of the
major surfaces comprising an embossed surface,
the embossed surface having at least one open-
faced sealant channel embossed therein, the at
least one embossed sealant channel
25 circumscribing the central portion of the
embossed surface and accommodating a
substantially fluid impermeable sealant
material therein, whereby the sealant material
fluidly isolates the central portion from the
30 atmosphere surrounding the plate, the embossed
surface further having a coolant inlet, a
coolant outlet, and at least one open-faced
coolant channel formed therein, whereby the at
least one coolant channel conducts pressurized

- 14 -

fluid introduced at the coolant inlet toward the coolant outlet.

5 In the preferred fuel cell, the major surface of the coolant flow field plate facing away from the membrane forms a cooling fluid flow field plate of an adjacent fuel cell. In the preferred fuel cell, the compressible, electrically conductive sheet comprises graphite foil.

10 The above and other objects are further achieved by an embossed coolant flow field plate for use in conjunction with an electrochemical cell. The plate comprises:

15 a sheet of compressible, electrically conductive, substantially fluid impermeable material, the sheet having two oppositely facing major surfaces, at least one of the major surfaces comprising an embossed surface, the embossed surface having at least one open-faced sealant channel embossed therein, the at
20 least one embossed sealant channel circumscribing the central portion of the embossed surface and accommodating a substantially fluid impermeable sealant material therein, whereby the sealant material
25 fluidly isolates the central portion from the atmosphere surrounding the plate, the embossed surface further having a coolant inlet, a coolant outlet, and at least one open-faced coolant channel formed therein, whereby the at
30 least one coolant channel conducts pressurized fluid introduced at the coolant inlet toward the coolant outlet.

In the preferred embossed coolant flow field plate, the at least one coolant channel is embossed

- 15 -

in the embossed surface. The at least one coolant channel can also be milled or die-cut in the embossed surface. In the preferred embossed coolant flow field plate, the compressible, electrically conductive sheet comprises graphite foil.

The above and other objects are still further achieved by an embossed separator plate for use in conjunction with an electrochemical cell. The plate comprises:

a sheet of compressible, electrically conductive material, the sheet having two oppositely facing major surfaces, at least one of the major surfaces comprising an embossed surface, the embossed surface having at least one open-faced sealant channel embossed therein, the at least one embossed sealant channel circumscribing the central portion of the embossed surface and accommodating a substantially fluid impermeable sealant material therein, whereby the sealant material fluidly isolates the central portion from the atmosphere surrounding the plate.

In the preferred separator plate, the embossed surface has a fluid inlet formed therein and at least one open-faced inlet channel formed therein. The at least one inlet channel extends from the fluid inlet, whereby the at least one inlet channel conducts pressurized fluid introduced at the fluid inlet. The embossed surface preferably has a fluid outlet formed therein, and further has at least one open-faced outlet channel formed therein. The at least one outlet channel extends from the fluid outlet, whereby the at least one outlet channel

- 16 -

conducts pressurized fluid to the fluid outlet.
The inlet channel and the outlet channel are most
preferably embossed in the embossed surface. The
inlet channel and the outlet channel can also be
5 milled or die-cut in the embossed surface.

As in the preferred embossed fluid flow field
plate, the inlet and outlet channels can be
continuous, preferably arranged in a serpentine
pattern on the embossed surface, or discontinuous,
10 preferably arranged in an interdigitated pattern on
the embossed surface.

In the preferred separator plate, the
compressible, electrically conductive sheet
comprises graphite foil. In another preferred
15 embodiment, the compressible, electrically
conductive sheet is a laminated assembly comprising
at least two layers of graphite foil and a metal
foil layer interposed between each adjacent pair of
graphite foil layers.

20 The above and other objects are yet further
achieved by an embossed separator plate for use in
conjunction with an electrochemical cell. The
plate comprises:

a sheet of compressible, electrically
25 conductive material, the sheet having two
oppositely facing major surfaces and at least
one manifold opening formed therein between
the major surfaces, at least one of the major
surfaces comprising an embossed surface, the
30 embossed surface having at least one open-
faced sealant channel embossed therein, the at
least one embossed sealant channel
circumscribing the at least one manifold
opening and accommodating a substantially

- 17 -

fluid impermeable sealant material therein,
whereby the sealant material fluidly isolates
the at least one manifold opening from the
atmosphere surrounding the plate.

5 The above and other objects are also achieved
by a method of fabricating an embossed separator
plate for use in conjunction with an
electrochemical cell. The method comprises:

10 providing a sheet of compressible,
electrically conductive sheet material, the
sheet having two oppositely facing major
surfaces;

 embossing at least one open-faced channel
in at least one of the major surfaces.

15 The preferred method further comprises:

 forming a fluid inlet on at least one of
the major surfaces such that the at least one
channel extends from the fluid inlet,

20 whereby the at least one channel
conducts pressurized fluid introduced at
the fluid inlet.

 In the preferred method, the at least one
embossed channel circumscribes the central portion
of the at least one major surface and accommodates
25 a substantially fluid impermeable sealant material
in the at least one embossed channel, whereby the
sealant material fluidly isolates the central
portion from the atmosphere surrounding the plate.
The most preferred method further comprises:

30 forming a fluid inlet on at least one of
the major surfaces;

 forming at least one open-faced channel
in the at least one of the major surfaces, the
at least one channel extending from the fluid

- 18 -

inlet, whereby the at least one channel conducts pressurized fluid introduced at the fluid inlet.

5 The at least one channel is preferably embossed in the at least one major surface. The at least one channel can also be milled or die-cut in the at least one major surface. In the preferred method, the compressible, electrically conductive sheet comprises graphite foil.

10 Brief Description Of The Drawings

FIG. 1 is a side elevation view of a fuel cell stack showing the electrochemically active and humidification sections.

15 FIG. 2 is an exploded side view of a fuel cell including a membrane electrode assembly interposed between two conventional fluid flow field plates having reactant flow channels formed in the major surfaces facing the electrodes.

20 FIG. 3 is an exploded side sectional view of a fuel cell including a membrane electrode assembly interposed between two laminated fluid flow field assemblies, one layer of which is a stencil layer having openings formed therein and the other layer of which is a separator layer.

25 FIG. 4a is a top plan view of one major surface of an embossed fluid flow field plate in accordance with the present invention.

30 FIG. 4b is a top plan view of the other major surface of the embossed fluid flow field plate illustrated in FIG. 4a.

FIG. 5a is a top plan view of one major surface of an embossed separator plate in accordance with the present invention.

- 19 -

FIG. 5b is a top plan view of the other major surface of the embossed separator plate illustrated in FIG. 5a.

FIG. 6 is a side view of a fuel cell
5 incorporating an embossed fluid flow field plate in accordance with the present invention.

FIG. 7a is a top plan view of one major surface of a coolant flow field plate in accordance with the present invention.

10 FIG. 7b is a top plan view of the other major surface of the coolant flow field plate illustrated in FIG. 7a.

FIG. 8 is a plot of cell voltage as a function of current density for two fuel cells (designated
15 "A" and "B"). Plot A shows the performance of a fuel cell employing conventional fluid flow field plates formed of solid graphite, such as that illustrated in FIG. 2. Plot B shows the performance of a fuel cell employing embossed fluid
20 flow field plates, such as those illustrated in FIGS. 4a and 4b.

FIG. 9 is a plot of cell voltage as a function of current density for two fuel cells (designated
25 "C" and "D") at 30/30 psig (air/H₂). Plot C shows the performance of a fuel cell employing an embossed coolant flow field plate. Plot D shows the performance of a fuel cell employing a conventional coolant flow field plate formed of solid graphite.

30 FIG. 10 is a plot of cell voltage as a function of current density for a fuel cell (designated "E") at 30/30 psig (air/H₂). The plot of FIG. 10 shows the performance of a fuel cell employing both embossed fluid flow field plates and

- 20 -

an embossed coolant flow field plate.

Detailed Description Of The Preferred Embodiments

Turning first to FIG. 1, a fuel cell stack assembly 10 includes an electrochemically active section 26 and optionally includes a humidification section 28. Stack assembly 10 is a modular plate and frame design, and includes a compression end plate 16 and a fluid end plate 18. An optional pneumatic piston 17, positioned within compression end plate 16, applies uniform pressure to the assembly to promote sealing. Bus plates 22 and 24 located on opposite ends of active section 26 provide the negative and positive contacts, respectively, for the electrical path conducting current generated by the assembly to an external electrical load (not shown). Tie rods 20 extend between end plates 16 and 18 to retain and secure stack assembly 10 in its assembled and consolidated state with fastening nuts 21.

Active section 26 includes, in addition to bus plates 22 and 24, a plurality of fuel cell repeating units 12. Each repeating unit 12 consists of a membrane electrode assembly, an anode fluid flow field plate, a cathode fluid flow field plate (or alternatively anode and cathode separator layers if the anode and cathode reactant flow channels are formed in the surfaces of the electrode material) and optionally a coolant jacket, as described in more detail below. In the assembly illustrated in FIG. 1, the repeating units 12 are electrically coupled in series by virtue of the contact between the electrically conductive layers which form the flow field plates (or the

- 21 -

separator layers) and the coolant jackets.

Optional humidification section 28 includes a plurality of humidification assemblies 14, each assembly 14 consisting of fuel or oxidant reactant flow field plate, a water flow field plate, and a water transport membrane interposed between the reactant flow field plate and the water flow field plate. When present, humidification section 28 imparts water to the fuel and oxidant streams fed to active section 26, thereby preventing the membranes within the active section from drying out.

FIG. 2 illustrates a conventional fuel cell 30, which includes a membrane electrode assembly 32 interposed between rigid flow field plates 34 and 36. Membrane electrode assembly 32 consists of an ion exchange membrane 42 interposed between two electrodes, namely, anode 44 and cathode 46. Anode 44 and cathode 46 are typically formed of porous electrically conductive sheet material, preferably carbon fiber paper, and have planar major surfaces 44a and 46a, respectively. Electrodes 44 and 46 have a thin layer of catalyst material disposed on their major surfaces 44a and 46a, respectively, at the interface with membrane 42 to render them electrochemically active.

As shown in FIG. 2, anode flow field plate 34 has at least one open faced channel 34a engraved, milled or molded in its surface facing membrane 42. Similarly, cathode flow field plate 36 has at least one open faced channel 36a engraved, milled or molded in its major surface facing membrane 42. When assembled against the cooperating major surfaces of electrodes 44 and 46, channels 34a and

- 22 -

36a form the reactant flow field passages for the fuel and oxidant, respectively.

FIG. 3 illustrates a fuel cell 50 including a membrane electrode assembly 52 interposed between two laminated fluid flow field assemblies 54 and 56. As in the membrane electrode assembly 32 of FIG. 2, membrane electrode assembly 52 consists of an ion exchange membrane 62 interposed between two electrodes, namely, anode 64 and cathode 66. Anode 64 and cathode 66 are also typically formed of porous electrically conductive sheet material, preferably carbon fiber paper, and have planar major surfaces 64a and 66a, respectively. Electrodes 64 and 66 have a thin layer of catalyst material disposed on their major surfaces 64a and 66a, respectively, at the interface with membrane 62 to render them electrochemically active.

As shown in FIG. 3, anode fluid flow field plate 54 is a laminated assembly of stencil layer 74 and separator layer 76. Similarly, cathode fluid flow field plate 56 is a laminated assembly of stencil layer 84 and separator layer 86.

FIG. 4a shows one major surface of an embossed reactant fluid flow field plate 100 in accordance with the present invention. Plate 100 is preferably formed from compressible, electrically conductive graphite foil sheet material commercially available under the trade designation "GRAFOIL" from UCAR Carbon Company, Inc. of Cleveland, Ohio. GRAFOIL sheets are available in standard thicknesses (1/32 inch, 1/16 inch and 1/8 inch, for example), but other thicknesses of graphite foil sheets can be employed as well. The most preferred form of GRAFOIL for use in

- 23 -

fabricating the embossed fluid flow field plates of the present invention is UCAR's grade "GH-A" gasket laminate, and the most preferred thickness is approximately .064 inches.

5 Other suitable electrically conductive materials, sufficiently soft so as to permit embossing, could be used to fabricate the embossed fluid flow field plates described and claimed herein. Such other materials include porous,
10 electrically conductive sheet materials, such as carbon fiber paper, as well as corrosion resistant metals such as niobium, somewhat corrosive resistant materials such as magnesium or copper, particularly when plated with noble metals such as
15 gold or platinum to render them unreactive, and composite materials composed of a corrosive resistant metal powder, a base metal powder plated with the corrosive resistant metal, and/or other chemically inert electrically conductive powders,
20 such as graphite and boron carbide, bonded together with a suitable binder to produce a compressible, electrically conductive sheet material.

 As shown in FIG. 4a, a sheet 101, formed of compressible, electrically conductive material,
25 preferably graphite foil, has a major surface 102. Fluid inlet opening 104 and fluid outlet opening 106 are die-cut and extend between the major surface 102 and its oppositely facing major surface 103 shown in FIG. 4b. Other manifold openings 108
30 are also die-cut and extend between the oppositely facing major surfaces of sheet 101.

 Major surface 102 of plate 100 has embossed therein a reactant fluid flow field 110 comprising a pair of continuous fluid flow field channels 114,

- 24 -

as well as a sealant channel 112. Each flow field channel 114 has a fluid inlet 116 at one end and a fluid outlet 118 at the other end. Fluid inlet 116 is directly connected to fluid inlet opening 104.

5 Similarly, fluid outlet 118 is directly connected to a fluid outlet opening 106. Fluid inlet opening 104 is connected to a source of fuel (not shown) in the case of the anode flow field plate or a source of oxidant (not shown) in the case of the cathode

10 flow field plate. Channel 114 traverses the major central area of major surface 102, in a plurality of passes (two passes in the embodiment illustrated in FIG. 4a), which in turn generally corresponds to the electrocatalytically active region of the anode

15 or cathode, which is adjacent when the cell is assembled. Openings 108 serve as manifolds for the various fluid reactant and coolant streams within the cell.

Fluid flow field channels 114 are preferably

20 embossed in sheet 101 using a die, such as a graphite plate, which has the reverse image of the desired flow field and sealing groove. Channels 114 are generally U-shaped or V-shaped in cross-section, the V-shaped channels facilitating die

25 release in certain embossing applications. The graphite foil sheet is embossed at an embossing pressure sufficient to impart, into the compressible sheet material, smooth-surfaced channels, of substantially uniform depth, and

30 having a clean, reverse image of the embossing die. Different flow field patterns and plate sizes will require different embossing pressures. The bulk of the sheet material (that is, the portions of the sheet material located apart from the channels) can

- 25 -

also be compressed during the embossing operation. In this regard, the embossing pressure can be selected to provide the appropriate channel depth and cross-sectional profile, and also to impart the appropriate electrical conductivity and porosity to the bulk material.

FIG. 5a shows one major surface of an embossed separator plate 120 in accordance with the present invention. Plate 120 is preferably comprises compressible, electrically conductive sheet material, preferably graphite foil. Sheet 121 has a major surface 122. Fluid inlet opening 124 and fluid outlet opening 126 are die-cut and extend between the major surface 122 and its oppositely facing major surface 123 shown in FIG. 5b. Other manifold openings 128 are also die-cut and extend between the oppositely facing major surfaces of plate 121.

Major surface 122 of sheet 121 has embossed therein an open-faced sealant channel 125. Fluid inlet opening 124 is connected to a source of fuel (not shown) in the case of the anode flow field plate or a source of oxidant (not shown) in the case of the cathode flow field plate. Pressurized reactant fluid introduced at the inlet opening 124 is directed to the central electrocatalytically active region of the anode or cathode, which is adjacent when the cell is assembled, via channels formed in the adjacent anode or cathode or via the interstitial spaces within the porous sheet material from which the adjacent anode or cathode is preferably formed. Openings 128 serve as manifolds for the various fluid reactant and coolant streams within the cell.

- 26 -

Sealant channel 125 is preferably embossed in sheet 121 using a die, in a manner similar to which the sealant channel 112 and the reactant fluid flow field channel 114 are embossed in sheet 101 illustrated in FIG. 4a. As shown in FIG. 5a, sealant channel 125 circumscribes the central portion of surface 122, as well as openings 128. Sealant channel 125 accommodates a substantially fluid impermeable sealant material (not shown) disposed in channel 125. In operation, the sealant material fluidly isolates the central portion of surface 122 from the atmosphere surrounding plate 120. As shown in FIG. 5b, sealant channel 127 in surface 123 is structurally and functionally identical to channel 125 in surface 122.

The separator plate 120 illustrated in FIGS. 5a and 5b has no reactant fluid flow field channels embossed, milled, die-cut or otherwise formed therein. It will be understood, however, that such channels could be formed in either or both of the major surfaces 122, 123 of sheet 121 to provide a fluid flow field plate similar to that illustrated in FIGS. 4a and 4b.

FIG. 6 shows an exploded side view of a fuel cell repeating unit, such as repeating unit 12 in FIG. 1, employing embossed reactant and coolant flow field plates. As shown in FIG. 6, a unit cell repeating unit 130 is made up of an embossed cathode (oxidant) fluid flow field or separator plate 132, a membrane electrode assembly (MEA) 134, an anode (fuel) fluid flow field or separator plate 136, and a coolant flow field plate or water jacket 138.

The embossed reactant (fuel and oxidant) and

- 27 -

coolant flow field plates 132, 136, 138 of the fuel cell repeating unit 130 of FIG. 6 are preferably formed from graphite foil sheets. The unit cell has a thickness of approximately 0.200 inches and a unit cell weight of approximately 218 grams.

Reduced cell weight and volume are achieved with these graphite foil sheets, which are considerably thinner and lighter than conventional milled graphite fluid flow field plates. The embossed fluid flow field plates thus drastically reduce the weight and volume of the fuel cell stack.

Although embossed coolant flow field plates may be employed as described above, die-cut coolant flow channels and embossed sealant channels can also be formed in the coolant flow field plates. FIGS. 7a and 7b are views, respectively, of a double-sided coolant flow field plate 150 having die-cut coolant flow channels 157, 167 and embossed sealant channels 159, 169 formed therein. Die-cut coolant flow channels 157, 167 extend between the major surfaces of plate 150. Plate 150 preferably comprises compressible, electrically conductive sheet material, most preferably graphite foil. Channel 157 has associated therewith a coolant inlet 152 and a coolant outlet 154. A coolant inlet 152 is in fluid communication with the coolant inlet manifold opening 156. The coolant outlet 154 is in fluid communication with the coolant outlet manifold opening 157. In operation, the coolant flow field plate is assembled and sealed against a fluid flow field plate or separator plate of the adjacent MEAs. Each adjacent fluid flow field plate or separator plate cooperates with channels 157, 167 to form a four-

- 28 -

sided passage for containing and directing coolant fluid within channels 157, 167. Using the double-sided design, a single coolant flow field plate can conduct coolant fluid on each of its major surfaces, and simultaneously cool the anode and cathode of neighboring MEAs.

The fluid flow field in the embossed plates described herein may comprise a single or a plurality of continuous or discontinuous reactant flow channels die-cut or embossed therein. Conventional fluid flow field plates having continuous, serpentine channels are described and illustrated in Watkins U.S. Patent Nos. 4,988,583 and 5,108,849. Fluid flow field plates having discontinuous, interdigitated channels are described and illustrated in U.S. Patent Application Serial No. 07/975,791. While the present embossed fluid flow field plates are particularly suited to the discontinuous, interdigitated flow channels described in U.S. Patent Application Serial No. 07/975,791, the embossed configuration can also be employed in conjunction with continuous, serpentine flow channel configurations, such as those described in Watkins U.S. Patent Nos. 4,988,583 and 5,108,849.

The embossed fluid flow field plates described and illustrated herein contain fluid manifolds. It will be understood, however, that other means for introducing fluids to and discharging fluids from the surface of the assemblies are possible. For example, external manifolds may be preferred in some instances to introduce fluids through an inlet (or inlets) located along an edge (or edges) of the embossed fluid flow field plates and to discharge

- 29 -

fluids from the surface of the plates through an outlet (or outlets) located along another edge (or edges) of the plates. The embossed fluid flow field described and claimed herein extend to fuel cells employing such other external manifold designs.

The performance of electrochemical fuel cells incorporating embossed fluid flow field compares favorably to the performance of conventional fuel cells employing milled graphite fluid flow field plates. FIG. 8 is a plot of cell voltage as a function of current density for two fuel cells (designated "A" and "B") at 30/30 psig (air/H₂). In each of plots A and B, a milled graphite anode flow field plate was employed, along with the following operating conditions: 2.0/1.5 air/H₂ stoichiometry, temperature = 75°C, DuPont Nafion 117 cation exchange membrane. In Plot A, a 10-pass, conventional milled graphite cathode flow field plate was employed, such as that illustrated in FIG. 2. In Plot B, a 7-pass, embossed graphite foil cathode flow field plate was employed, such as that illustrated in FIG. 4. FIG. 8 shows that the performance of a fuel cell employing an embossed reactant fluid flow field plate compares favorably, and was superior at high current density, to the performance of a fuel cell employing conventional, milled graphite fluid flow field plates.

Similarly, the performance of a fuel cell employing embossed coolant flow field plates compares favorably to the performance of a conventional fuel cell employing milled graphite coolant flow field plates. FIG. 9 is a plot of cell voltage as a function of current density for

- 30 -

two fuel cells (designated "C" and "D") at 30/30
psig (air/H₂). In each of plots C and D, a milled
graphite anode flow field plate and a milled
graphite cathode flow field plate were employed,
5 along with the following operating conditions:
2.0/1.5 air/H₂ stoichiometry, temperature = 75°C,
DuPont Nafion 117 cation exchange membrane. Plot C
shows the performance of a fuel cell employing
embossed coolant flow field plates. Plot D shows
10 the performance of a fuel cell employing
conventional, milled graphite coolant flow field
plates.

In order to minimize cell weight and volume,
the electrochemical fuel cell of the present
15 invention preferably employs both embossed reactant
fluid flow field plates and embossed coolant flow
field plates. FIG. 10 is a plot of cell voltage as
a function of current density for a fuel cell
(designated "E") at 30/30 psig (air/H₂). A 2-pass
20 anode flow field plate was employed, along with the
following operating conditions: 2.0/1.5 air/H₂
stoichiometry, temperature = 75°C, Dow experimental
cation exchange membrane. FIG. 10 shows the
favorable performance achieved by a fuel cell
25 employing both embossed reactant fluid flow field
plates and embossed coolant flow field plates, as
well as the operability of the embossed reactant
and coolant flow field plates in conjunction with
the Dow experimental cation exchange membrane.

30 While particular elements, embodiments, and
applications of the present invention have been
shown and described, it will be understood, of
course, that the invention is not limited thereto
since modifications may be made by those skilled in

- 31 -

the art, particularly in light of the foregoing teachings. It is therefore contemplated by the appended claims to cover such modifications as incorporate those features which come within the
5 spirit and scope of the invention.

- 32 -

What is claimed is:

1. An embossed fluid flow field plate for use in conjunction with an electrochemical cell, said plate comprising:

5 a sheet of compressible, electrically conductive material, said sheet having two oppositely facing major surfaces, at least one of said major surfaces comprising an embossed surface, said embossed surface having a fluid inlet formed therein and further having at
10 least one open-faced inlet channel embossed therein, said at least one embossed inlet channel extending from said fluid inlet, whereby said at least one embossed inlet channel conducts pressurized fluid introduced
15 at said fluid inlet.

2. The embossed fluid flow field plate of claim 1 wherein said embossed surface has an inlet opening formed therein, said inlet opening extending between the major surfaces of said sheet,
5 said inlet opening in fluid communication with said fluid inlet.

3. The embossed fluid flow field plate of claim 1 wherein said embossed surface has a fluid outlet formed therein, said embossed surface further having at least one open-faced outlet
5 channel embossed therein, said at least one embossed outlet channel extending from said fluid outlet, whereby said at least one embossed outlet channel conducts pressurized fluid to said fluid outlet.

- 33 -

4. The embossed fluid flow field plate of claim 3 wherein said embossed surface has an outlet opening formed therein, said outlet opening extending between the major surfaces of said sheet, said outlet opening in fluid communication with said fluid outlet.

5. The embossed fluid flow field plate of claim 3 wherein said at least one embossed inlet channel extends into said at least one embossed outlet channel to form at least one embossed continuous channel, whereby pressurized fluid introduced at said fluid inlet is conducted to said fluid outlet along said at least one inlet channel and said at least one outlet channel.

6. The embossed fluid flow field plate of claim 5 wherein said at least one embossed continuous channel forms a serpentine pattern on said embossed surface.

7. The embossed fluid flow field plate of claim 3 wherein said at least one embossed inlet channel is discontinuous with respect to said at least one embossed outlet channel.

8. The embossed fluid flow field plate of claim 7 wherein said at least one embossed outlet channel comprises at least two embossed outlet channels, and wherein said at least one embossed inlet channel and said at least two embossed outlet channels are interdigitated, whereby each adjacent pair of embossed outlet channels has an embossed

- 34 -

inlet channel disposed therebetween along a substantial portion thereof.

9. The embossed fluid flow field plate of claim 1 wherein said sheet comprises graphite foil.

10. The embossed fluid flow field plate of claim 1 wherein said embossed surface further has at least one open-faced sealant channel embossed therein, said at least one embossed sealant channel
5 circumscribing the central portion of said embossed surface and accommodating a substantially fluid impermeable sealant material therein, whereby said sealant material fluidly isolates said central portion from the atmosphere surrounding said plate.

11. The embossed fluid flow field plate of claim 4 wherein said embossed surface has an inlet opening formed therein, said inlet opening extending between the major surfaces of said sheet,
5 said inlet opening in fluid communication with said fluid inlet, and wherein said embossed surface further has at least one open-faced sealant channel embossed therein, said at least one embossed sealant channel circumscribing the central portion
10 of said embossed surface and further circumscribing said inlet opening and said outlet opening, said at least one embossed sealant channel accommodating a substantially fluid impermeable sealant material therein, whereby said sealant material fluidly
15 isolates said central portion, said inlet opening and said outlet opening from the atmosphere surrounding said plate.

12. An electrochemical fuel cell for converting a fluid fuel stream and a fluid oxidant stream to a reaction product stream and electrical energy, said fuel cell comprising;

- 35 -

5 first and second embossed fluid flow
field plates, each of said plates comprising:
 a separator sheet formed of
 compressible, electrically conductive
 material, said separator sheet having two
10 oppositely facing major surfaces, at
 least one of said major surfaces
 comprising an embossed surface, said
 embossed surface having a fluid inlet
 formed therein and further having at
15 least one open-faced inlet channel
 embossed therein, said at least one
 embossed inlet channel extending from
 said fluid inlet, whereby said at least
 one embossed inlet channel conducts
20 pressurized fluid introduced at said
 fluid inlet;

 a membrane electrode assembly interposed
 between said first and second embossed fluid flow
 field plates, said membrane electrode assembly
25 comprising:

 an anode having a catalyst
 associated therewith to render a region
 of said anode electrocatalytically active
 wherein cations are produced from said
30 fluid fuel stream;

 a cathode having a catalyst
 associated therewith to render a region
 of said cathode electrocatalytically
 active wherein an electrochemical
35 reaction between said cations and said
 fluid oxidant stream is promoted;

- 36 -

40 a solid polymer ion exchange
membrane disposed between said anode
assembly and said cathode assembly, said
membrane facilitating the migration of
cations from said anode assembly to said
cathode assembly and isolating said fluid
fuel stream from said fluid oxidant
stream;

45 an electrical path for conducting
electrons formed at said anode assembly
to said cathode assembly.

13. The electrochemical fuel cell of claim
12, further comprising a coolant flow field plate
adjacent one of said separator sheets on the side
facing away from said membrane, said coolant flow
5 field plate comprising:

a sheet of compressible, electrically
conductive, substantially fluid impermeable
material, said sheet having two oppositely
facing major surfaces, at least one of said
10 major surfaces comprising an embossed surface,
said embossed surface having at least one
open-faced sealant channel embossed therein,
said at least one embossed sealant channel
circumscribing the central portion of said
15 embossed surface and accommodating a
substantially fluid impermeable sealant
material therein, whereby said sealant
material fluidly isolates said central portion
from the atmosphere surrounding said plate,
20 said embossed surface further having a coolant
inlet, a coolant outlet, and at least one
open-faced coolant channel formed therein,

- 37 -

whereby said at least one coolant channel
conducts pressurized fluid introduced at said
25 coolant inlet toward said coolant outlet.

14. The electrochemical fuel cell of claim 13
wherein the major surface of said coolant flow
field plate facing away from said membrane forms a
cooling fluid flow field plate of an adjacent fuel
5 cell.

15. The electrochemical fuel cell of claim 12
wherein said sheet comprises graphite foil.

16. An embossed coolant flow field plate for
use in conjunction with an electrochemical cell,
said plate comprising:

a sheet of compressible, electrically
5 conductive, substantially fluid impermeable
material, said sheet having two oppositely
facing major surfaces, at least one of said
major surfaces comprising an embossed surface,
said embossed surface having at least one
10 open-faced sealant channel embossed therein,
said at least one embossed sealant channel
circumscribing the central portion of said
embossed surface and accommodating a
substantially fluid impermeable sealant
15 material therein, whereby said sealant
material fluidly isolates said central portion
from the atmosphere surrounding said plate,
said embossed surface further having a coolant
inlet, a coolant outlet, and at least one
20 open-faced coolant channel formed therein,
whereby said at least one coolant channel

- 38 -

conducts pressurized fluid introduced at said coolant inlet toward said coolant outlet.

17. The embossed coolant flow field plate of claim 16 wherein said at least one coolant channel is embossed in said embossed surface.

18. The embossed coolant flow field plate of claim 16 wherein said at least one coolant channel is milled in said embossed surface.

19. The embossed coolant flow field plate of claim 18 wherein said at least one coolant channel is die-cut in said embossed surface.

20. The embossed coolant flow field plate of claim 16 wherein said sheet comprises graphite foil.

21. An embossed separator plate for use in conjunction with an electrochemical cell, said plate comprising:

5 a sheet of compressible, electrically
conductive material, said sheet having two
oppositely facing major surfaces, at least one
of said major surfaces comprising an embossed
surface, said embossed surface having at least
one open-faced sealant channel embossed
10 therein, said at least one embossed sealant
channel circumscribing the central portion of
said embossed surface and accommodating a
substantially fluid impermeable sealant
material therein, whereby said sealant
15 material fluidly isolates said central portion

- 39 -

from the atmosphere surrounding said plate.

22. The separator plate of claim 21 wherein said central portion of said embossed surface has a fluid inlet formed therein and at least one open-faced inlet channel formed therein, said at least
5 one inlet channel extending from said fluid inlet, whereby said at least one inlet channel conducts pressurized fluid introduced at said fluid inlet.

23. The separator plate of claim 21 wherein said central portion of said embossed surface has a fluid outlet formed therein, said embossed surface further having at least one open-faced outlet
5 channel formed therein, said at least one outlet channel extending from said fluid outlet, whereby said at least one outlet channel conducts pressurized fluid to said fluid outlet.

24. The separator plate of claim 23 wherein said inlet channel and said outlet channel are embossed in said central portion of said embossed surface.

25. The separator plate of claim 23 wherein said inlet channel and said outlet channel are milled in said central portion of said embossed surface.

26. The separator plate of claim 25 wherein said inlet channel and said outlet channel are die-cut in said central portion of said embossed surface.

- 40 -

27. The separator plate of claim 23 wherein said central portion of said embossed surface has an inlet opening formed therein, said inlet opening extending between the major surfaces of said sheet,
5 said inlet opening in fluid communication with said fluid inlet.

28. The separator plate of claim 27 wherein said central portion of said embossed surface has an outlet opening formed therein, said outlet opening extending between the major surfaces of
5 said sheet, said outlet opening in fluid communication with said fluid outlet.

29. The separator plate of claim 23 wherein said at least inlet channel extends into said at least one outlet channel to form at least one continuous channel, whereby pressurized fluid
5 introduced at said fluid inlet is conducted to said fluid outlet along said at least one inlet channel and said at least one outlet channel.

30. The separator plate of claim 29 wherein said at least one continuous channel forms a serpentine pattern on said central portion of said embossed surface.

31. The separator plate of claim 29 wherein said at least one inlet channel is discontinuous with respect to said at least one outlet channel.

32. The separator plate of claim 31 wherein said at least one outlet channel comprises at least two outlet channels, and wherein said at least one inlet channel and said at least two outlet channels are interdigitated, whereby each adjacent pair of outlet channels has an inlet channel disposed therebetween along a substantial portion thereof.

33. The separator plate of claim 31 wherein said sheet comprises graphite foil.

34. An embossed separator plate for use in conjunction with an electrochemical cell, said plate comprising:

a sheet of compressible, electrically conductive material, said sheet having two oppositely facing major surfaces and at least one manifold opening formed therein between said major surfaces, at least one of said major surfaces comprising an embossed surface, said embossed surface having at least one open-faced sealant channel embossed therein, said at least one embossed sealant channel circumscribing said at least one manifold opening and accommodating a substantially fluid impermeable sealant material therein, whereby said sealant material fluidly isolates said at least one manifold opening from the atmosphere surrounding said plate.

- 42 -

35. A method of fabricating an embossed separator plate for use in conjunction with an electrochemical cell, said method comprising:

5 providing a sheet of compressible, electrically conductive sheet material, said sheet having two oppositely facing major surfaces;

 embossing at least one open-faced channel in at least one of said major surfaces.

36. The method of claim 35 further comprising:

5 forming a fluid inlet on at least one of said major surfaces such that said at least one channel extends from said fluid inlet, whereby said at least one channel conducts pressurized fluid introduced at said fluid inlet.

5 37. The method of claim 35 wherein said at least one embossed channel circumscribes the central portion of said at least one major surface and accommodates a substantially fluid impermeable sealant material in said at least one embossed channel, whereby said sealant material fluidly isolates said central portion from the atmosphere surrounding said plate.

- 43 -

38. The method of claim 37 further comprising:
forming a fluid inlet on at least one of
said major surfaces;

5

forming at least one open-faced channel in
said at least one of said major surfaces, said
at least one channel extending from said fluid
inlet, whereby said at least one channel
conducts pressurized fluid introduced at said
fluid inlet.

39. The method of claim 38 wherein said at
least one open-faced channel is embossed in said at
least one major surface.

40. The method of claim 38 wherein said at
least one open-faced channel is milled in said at
least one major surface.

41. The method of claim 40 wherein said at
least one open-faced channel is die-cut in said at
least one major surface.

42. The method of claim 35 wherein said sheet
comprises graphite foil.

43. A fluid flow field plate for use in
conjunction with an electrochemical cell, said
plate comprising:

5

a sheet of compressible, electrically
conductive material, said sheet having two
oppositely facing major surfaces, at least one
of said major surfaces comprising a die-pressed
surface, said die-pressed surface having a

- 44 -

10 fluid inlet formed therein and further having
at least one open-faced inlet channel die-
pressed therein, said at least one die-pressed
inlet channel extending from said fluid inlet,
whereby said at least one die-pressed inlet
channel conducts pressurized fluid introduced
15 at said fluid inlet.

44. The fluid flow field plate of claim 43
wherein said die-pressed surface has an inlet
opening formed therein, said inlet opening
extending between the major surfaces of said sheet,
5 said inlet opening in fluid communication with said
fluid inlet.

45. The fluid flow field plate of claim 43
wherein said die-pressed surface has a fluid outlet
formed therein, said die-pressed surface further
having at least one open-faced outlet channel die-
5 pressed therein, said at least one die-pressed
outlet channel extending from said fluid outlet,
whereby said at least one die-pressed outlet
channel conducts pressurized fluid to said fluid
outlet.

46. The fluid flow field plate of claim 45
wherein said die-pressed surface has an outlet
opening formed therein, said outlet opening
extending between the major surfaces of said sheet,
5 said outlet opening in fluid communication with
said fluid outlet.

47. The fluid flow field plate of claim 45
wherein said at least one die-pressed inlet channel
extends into said at least one die-pressed outlet

- 45 -

5 channel to form at least one die-pressed continuous channel, whereby pressurized fluid introduced at said fluid inlet is conducted to said fluid outlet along said at least one inlet channel and said at least one outlet channel.

48. The fluid flow field plate of claim 47 wherein said at least one die-pressed continuous channel forms a serpentine pattern on said die-pressed surface.

49. The fluid flow field plate of claim 45 wherein said at least one die-pressed inlet channel is discontinuous with respect to said at least one die-pressed outlet channel.

5 50. The fluid flow field plate of claim 49 wherein said at least one die-pressed outlet channel comprises at least two die-pressed outlet channels, and wherein said at least one die-pressed inlet channel and said at least two die-pressed outlet channels are interdigitated, whereby each adjacent pair of die-pressed outlet channels has a die-pressed inlet channel disposed therebetween along a substantial portion thereof.

51. The fluid flow field plate of claim 43 wherein said sheet comprises graphite.

5 52. The fluid flow field plate of claim 43 wherein said die-pressed surface further has at least one open-faced sealant channel die-pressed therein, said at least one die-pressed sealant channel circumscribing the central portion of said die-pressed surface and accommodating a

- 46 -

substantially fluid impermeable sealant material therein, whereby said sealant material fluidly isolates said central portion from the atmosphere surrounding said plate.

53. The fluid flow field plate of claim 46 wherein said die-pressed surface has an inlet opening formed therein, said inlet opening extending between the major surfaces of said sheet, said inlet opening in fluid communication with said fluid inlet, and wherein said die-pressed surface further has at least one open-faced sealant channel die-pressed therein, said at least one die-pressed sealant channel circumscribing the central portion of said die-pressed surface and further circumscribing said inlet opening and said outlet opening, said at least one die-pressed sealant channel accommodating a substantially fluid impermeable sealant material therein, whereby said sealant material fluidly isolates said central portion, said inlet opening and said outlet opening from the atmosphere surrounding said plate.

54. An electrochemical fuel cell for converting a fluid fuel stream and a fluid oxidant stream to a reaction product stream and electrical energy, said fuel cell comprising:

first and second fluid flow field plates, each of said plates comprising:

a separator sheet formed of compressible, electrically conductive material, said separator sheet having two oppositely facing major surfaces, at least one of said major surfaces comprising a die-pressed surface, said die-pressed surface having a fluid inlet formed therein and further having at least one

- 47 -

15 open-faced inlet channel die-pressed
 therein, said a least one die-pressed
 inlet channel extending from said fluid
 inlet, whereby said at least one die-
20 pressed inlet channel conducts pressurized
 fluid introduced at said fluid inlet;
 a membrane electrode assembly interposed
 between said first and second fluid flow field
 plates, said membrane electrode assembly
 comprising:

25 an anode having a catalyst associated
 therewith to render a region of said anode
 electrocatalytically active wherein
 cations are produced from said fluid fuel
 stream;

30 a cathode having a catalyst
 associated therewith to render a region of
 said cathode electrocatalytically active
 wherein an electrochemical reaction
 between said cations and said fluid
35 oxidant stream is promoted;

 a solid polymer ion exchange membrane
 disposed between said anode assembly and
 said cathode assembly, said membrane
 facilitating the migration of cations from
40 said anode assembly to said cathode
 assembly and isolating said fluid fuel
 stream from said fluid oxidant stream;

 an electrical path for conducting
 electrons formed at said anode assembly to
45 said cathode assembly.

- 48 -

55. The electrochemical fuel cell of claim 54, further comprising a coolant flow field plate adjacent one of said separator sheets on the side facing away from said membrane, said coolant flow field plate comprising:

5 a sheet of compressible, electrically conductive, substantially fluid impermeable material, said sheet having two oppositely facing major surfaces, at least one of said major surfaces comprising a die-pressed surface, said die-pressed surface having at least one open-faced sealant channel die-pressed therein, said at least one die-pressed sealant channel circumscribing the central portion of said die-pressed surface and accommodating a substantially fluid impermeable sealant material therein, whereby said sealant material fluidly isolates said central portion from the atmosphere surrounding said plate, said die-pressed surface further having a coolant inlet, a coolant outlet, and at least one open-faced coolant channel formed therein, whereby said at least one coolant channel conducts pressurized fluid introduced at said coolant inlet toward said coolant outlet.

56. The electrochemical fuel cell of claim 55 wherein the major surface of said coolant flow field plate facing away from said membrane forms a cooling fluid flow field plate of an adjacent fuel cell.

57. The electrochemical fuel cell of claim 54 wherein said sheet comprises graphite.

- 49 -

58. A coolant flow field plate for use in conjunction with an electrochemical cell, said plate comprising:

5 a sheet of compressible, electrically
conductive, substantially fluid impermeable
material, said sheet having two oppositely
facing major surfaces, at least one of said
major surfaces comprising a die-pressed
10 surface, said die-pressed surface having at
least one open-faced sealant channel die-
pressed therein, said at least one die-pressed
sealant channel circumscribing the central
portion of said die-pressed surface and
15 accommodating a substantially fluid impermeable
sealant material therein, whereby said sealant
material fluidly isolates said central portion
from the atmosphere surrounding said plate,
said die-pressed surface further having a
coolant inlet, a coolant outlet, and at least
20 one open-faced coolant channel formed therein,
whereby said at least one coolant channel
conducts pressurized fluid introduced at said
coolant inlet toward said coolant outlet.

59. The coolant flow field plate of claim 58 wherein said at least one coolant channel is die-pressed in said die-pressed surface.

60. The coolant flow field plate of claim 58 wherein said at least one coolant channel is milled in said die-pressed surface.

61. The coolant flow field plate of claim 60 wherein said at least one coolant channel is die-cut in said die-pressed surface.

- 50 -

62. The coolant flow field plate of claim 58 wherein said sheet comprises graphite.

63. A separator plate for use in conjunction with an electrochemical cell, said plate comprising:

5 a sheet of compressible, electrically
conductive material, said sheet having two
oppositely facing major surfaces, at least one
of said major surfaces comprising a die-pressed
surface, said die-pressed surface having at
10 least one open-faced sealant channel die-
pressed therein, said at least one die-pressed
sealant channel circumscribing the central
portion of said die-pressed surface and
accommodating a substantially fluid impermeable
15 sealant material therein, whereby said sealant
material fluidly isolates said central portion
from the atmosphere surrounding said plate.

64. The separator plate of claim 63 wherein
said central portion of said die-pressed surface
has a fluid inlet formed therein and at least one
open-faced inlet channel formed therein, said at
5 least one inlet channel extending from said fluid
inlet, whereby said at least one inlet channel
conducts pressurized fluid introduced at said fluid
inlet.

65. The separator plate of claim 63 wherein
said central portion of said die-pressed surface
has a fluid outlet formed therein, said die-pressed
surface further having at least one open-faced
5 outlet channel formed therein, said at least one
outlet channel extending from said fluid outlet,

- 51 -

whereby said at least one outlet channel conducts pressurized fluid to said fluid outlet.

66. The separator plate of claim 65 wherein said inlet channel and said outlet channel are die-pressed in said central portion of said die-pressed surface.

67. The separator plate of claim 65 wherein said inlet channel and said outlet channel are milled in said central portion of said die-pressed surface.

68. The separator plate of claim 67 wherein said inlet channel and said outlet channel are die-cut in said central portion of said die-pressed surface.

5 69. The separator plate of claim 65 wherein said central portion of said die-pressed surface has an inlet opening formed therein, said inlet opening extending between the major surfaces of said sheet, said inlet opening in fluid communication with said fluid inlet.

5 70. The separator plate of claim 69 wherein said central portion of said die-pressed surface has an outlet opening formed therein, said outlet opening extending between the major surfaces of said sheet, said outlet opening in fluid communication with said fluid outlet.

71. The separator plate of claim 65 wherein said at least inlet channel extends into said at least one outlet channel to form at least one

- 52 -

5 continuous channel, whereby pressurized fluid introduced at said fluid inlet is conducted to said fluid outlet along said at least one inlet channel and said at least one outlet channel.

72. The separator plate of claim 71 wherein said at least one continuous channel forms a serpentine pattern on said central portion of said die-pressed surface.

73. The separator plate of claim 72 wherein said at least one inlet channel is discontinuous with respect to said at least one outlet channel.

5 74. The separator plate of claim 73 wherein said at least one outlet channel comprises at least two outlet channels, and wherein said at least one inlet channel and said at least two outlet channels are interdigitated, whereby each adjacent pair of outlet channels has an inlet channel disposed therebetween along a substantial portion thereof.

75. The separator plate of claim 73 wherein said sheet comprises graphite.

76. A separator plate for use in conjunction with an electrochemical cell, said plate comprising:

5 a sheet of compressible, electrically conductive material, said sheet having two oppositely facing major surfaces and at least one manifold opening formed therein between said major surfaces, at least one of said major surfaces comprising a die-pressed surface, said
10 die-pressed surface having at

- 53 -

15 least one open-faced sealant channel die-pressed therein, said at least one die-pressed sealant channel circumscribing said at least one manifold opening and accommodating a substantially fluid impermeable sealant material therein, whereby said sealant material fluidly isolates said at least one manifold opening from the atmosphere surrounding said plate.

77. A method of fabricating a separator plate for use in conjunction with an electrochemical cell, said method comprising:

5 providing a quantity of compressible, electrically conductive material sufficient to form a sheet having two oppositely facing major surfaces;

10 applying pressure from a die surface to said quantity of electrically conductive material, said die surface having a reverse channel image formed therein;

whereby an electrically conductive sheet is formed having at least one open-faced channel in at least one of said major surfaces.

78. The method of claim 77 further comprising:

forming a fluid inlet on at least one of said major surfaces such that said at least one channel extends from said fluid inlet,

5 whereby said at least one channel conducts pressurized fluid introduced at said fluid inlet.

79. The method of claim 77 wherein said at least one channel circumscribes the central portion of said at least one major surface and accommodates a substantially fluid impermeable sealant material

- 54 -

5 in said at least one channel, whereby said sealant material fluidly isolates said central portion from the atmosphere surrounding said plate.

80. The method of claim 79 further comprising:
forming a fluid inlet on at least one of
said major surfaces;

5 forming at least one open-faced channel in
said at least one of said major surfaces, said
at least one channel extending from said fluid
inlet, whereby said at least one channel
conducts pressurized fluid introduced at said
fluid inlet.

81. The method of claim 80 wherein said at
least one open-faced channel is die-pressed in said
at least one major surface.

82. The method of claim 80 wherein said at
least one open-faced channel is milled in said at
least one major surface.

83. The method of claim 82 wherein said at
least one open-faced channel is die-cut in said at
least one major surface.

84. The method of claim 77 wherein said
electrically conductive material comprises
graphite.

85. The method of claim 84 wherein said
electrically conductive material comprises graphite
powder.

86. The method of claim 77 wherein said
electrically conductive material comprises boron
carbide.

- 55 -

87. The method of claim 86 wherein said electrically conductive material comprises boron carbide powder.

88. The method of claim 77 wherein said electrically conductive material comprises niobium.

89. The method of claim 88 wherein said electrically conductive material comprises niobium powder.

90. The method of claim 77 wherein said electrically conductive material comprises magnesium.

91. The method of claim 90 wherein said electrically conductive material comprises magnesium powder.


92. The method of claim 91 wherein said magnesium powder is plated with a noble metal taken from the group comprising gold and platinum.

93. The method of claim 77 wherein said electrically conductive material comprises copper.

94. The method of claim 93 wherein said electrically conductive material comprises copper powder.

95. The method of claim 94 wherein said copper powder is plated with a noble metal taken from the group comprising gold and platinum.

Fig. 1

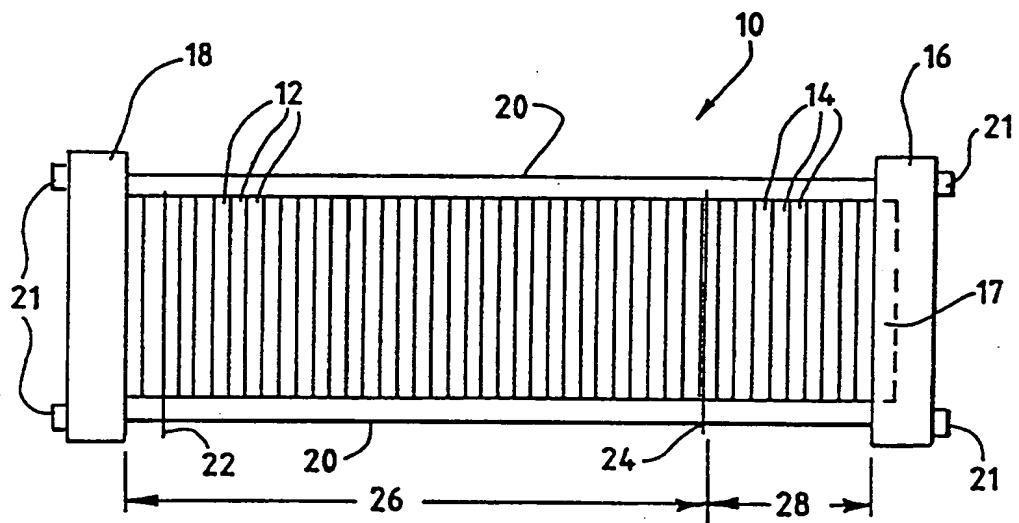

SUBSTITUTE SHEET

Fig. 2


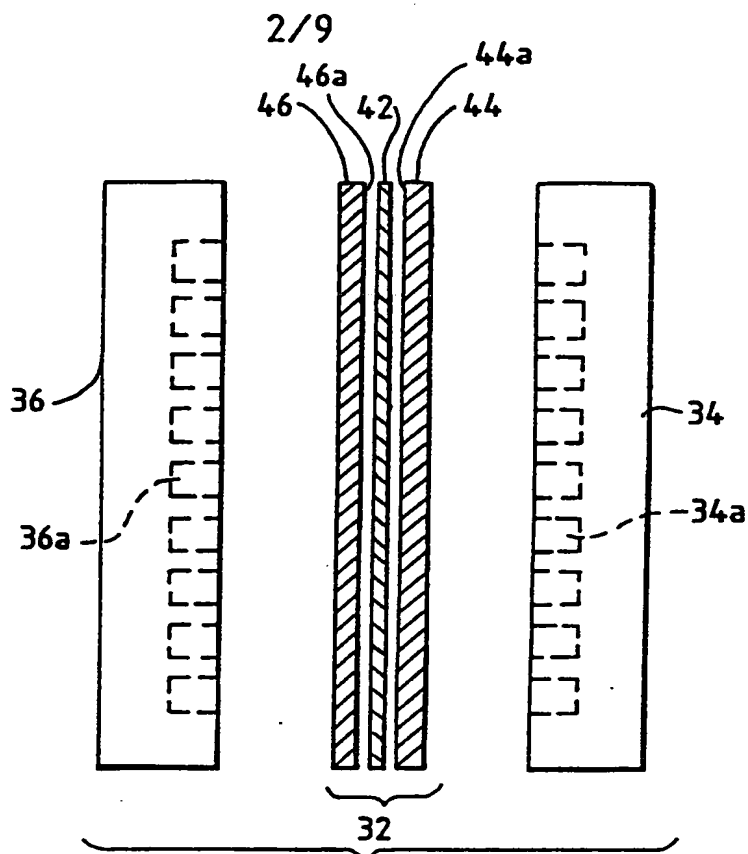


Fig. 3

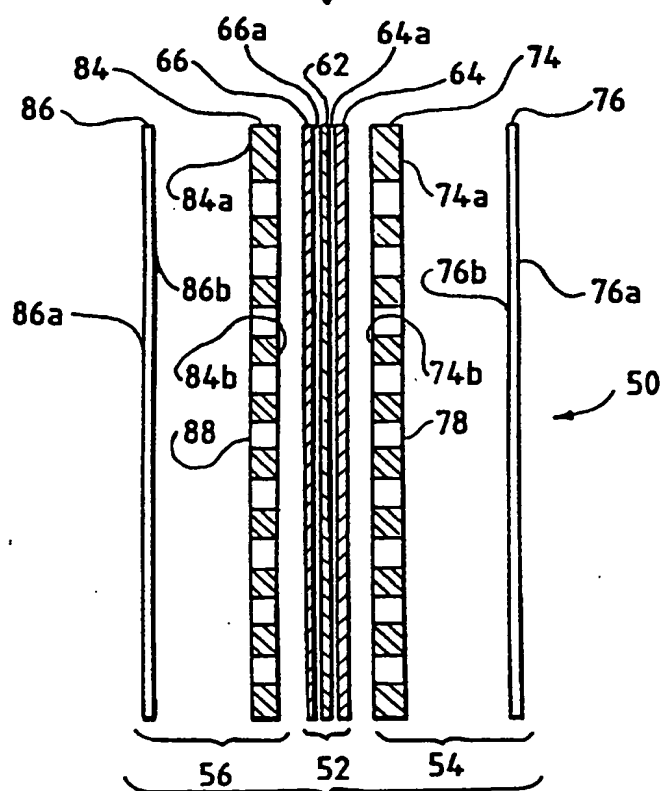

SUBSTITUTE SHEET

3/9

Fig. 4a


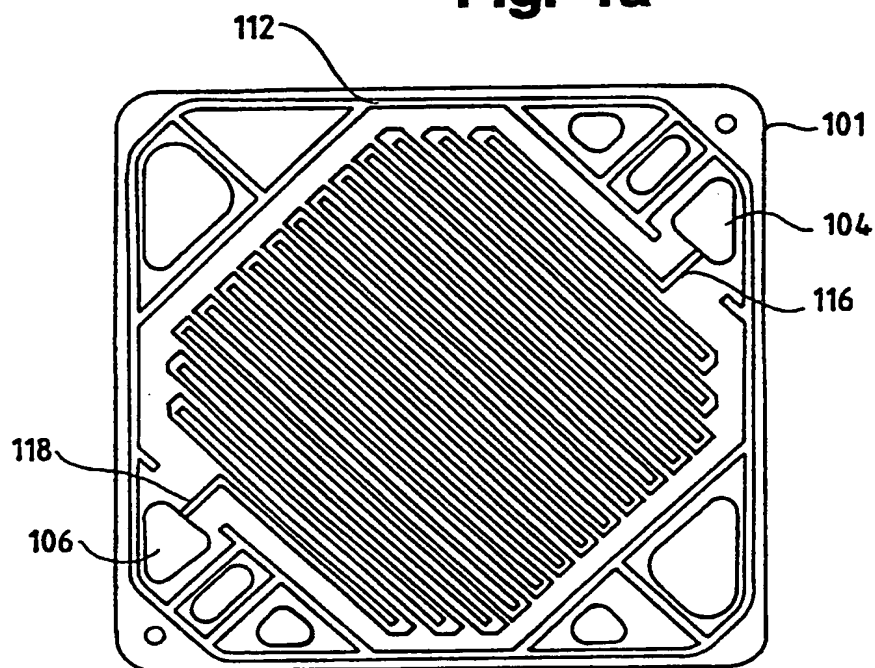


Fig. 4b

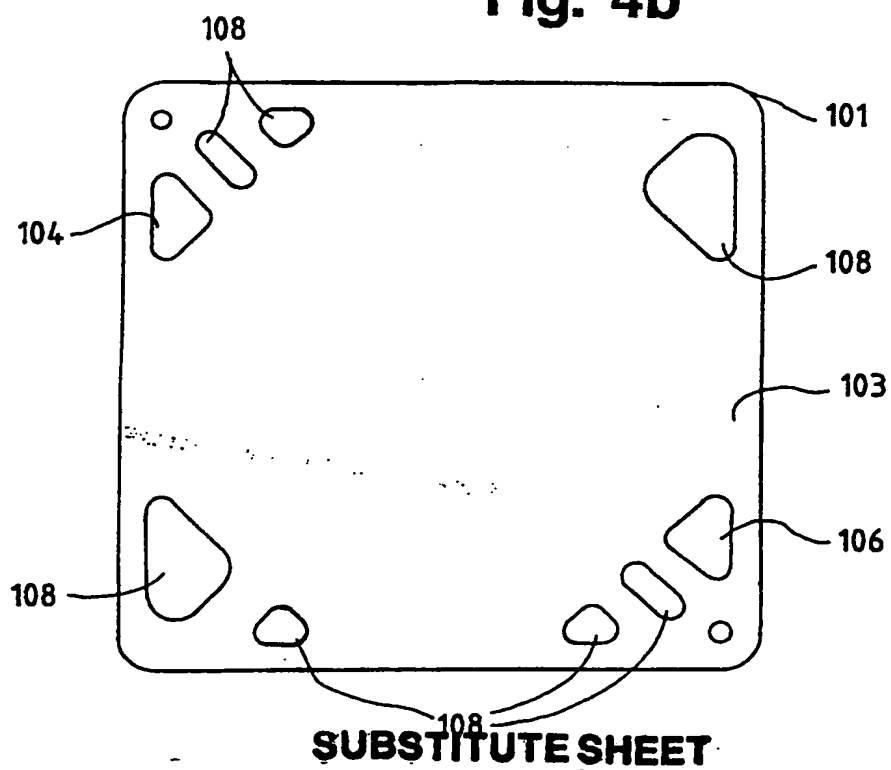

4/9

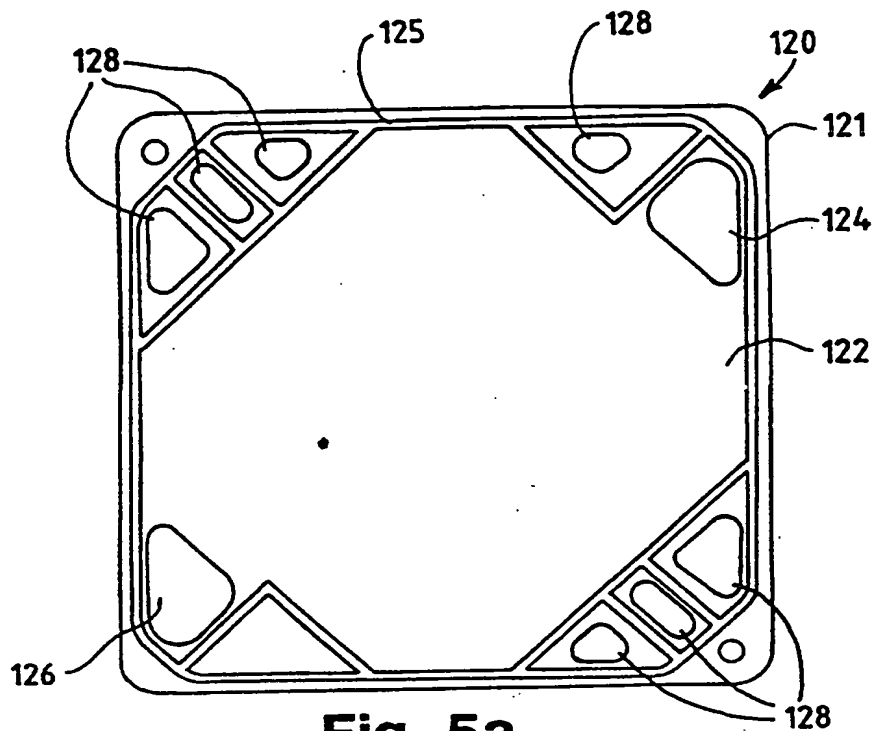


Fig. 5a


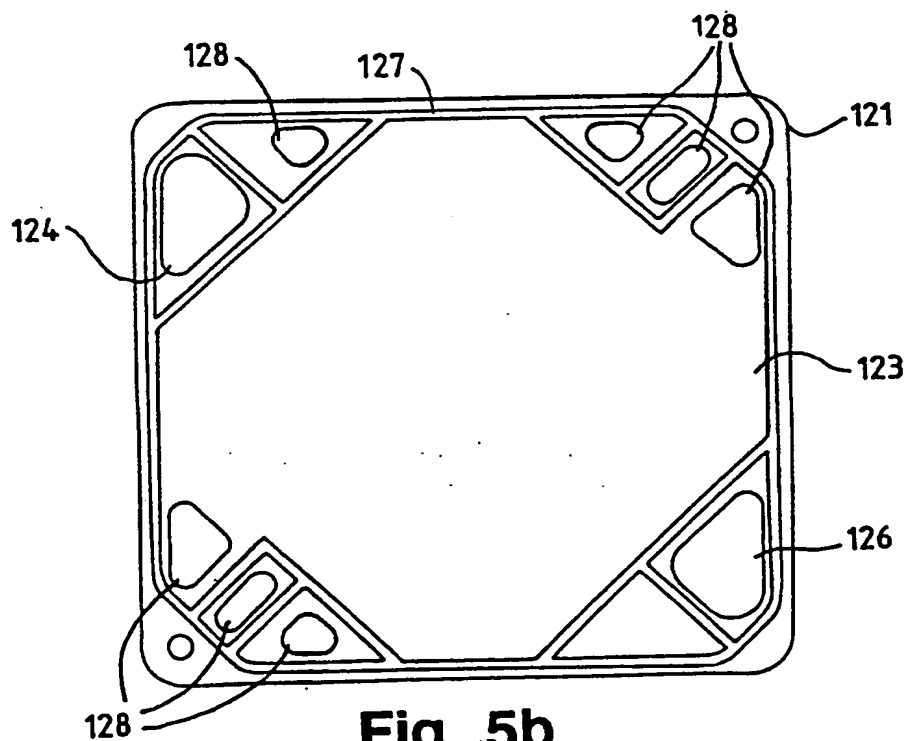


Fig. 5b
SUBSTITUTE SHEET

5/9

Fig. 6

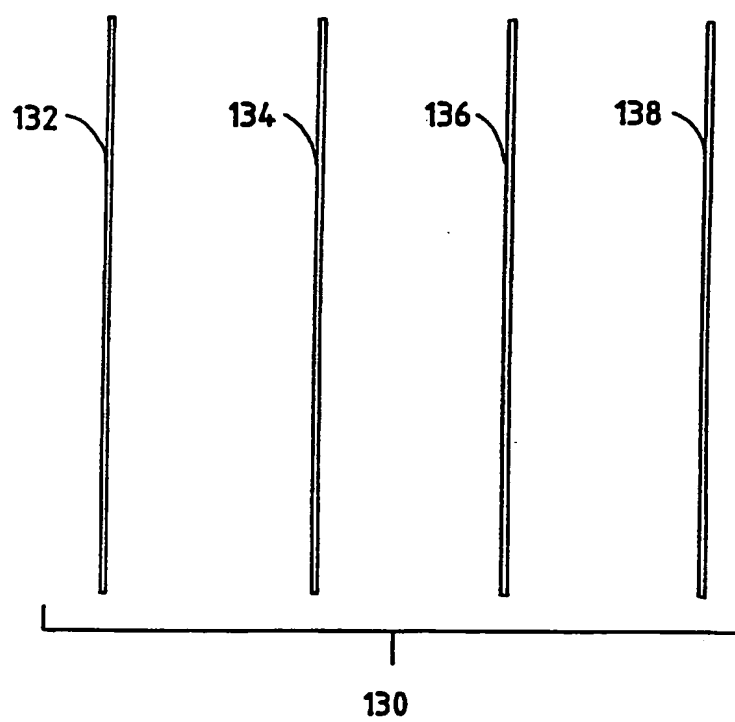

SUBSTITUTE SHEET

6/9

Fig. 7a


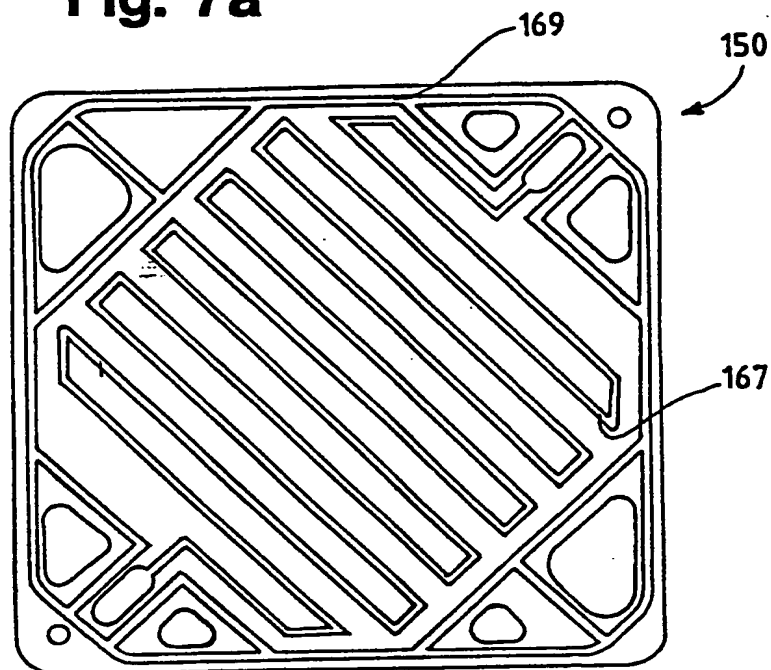



Fig. 7b

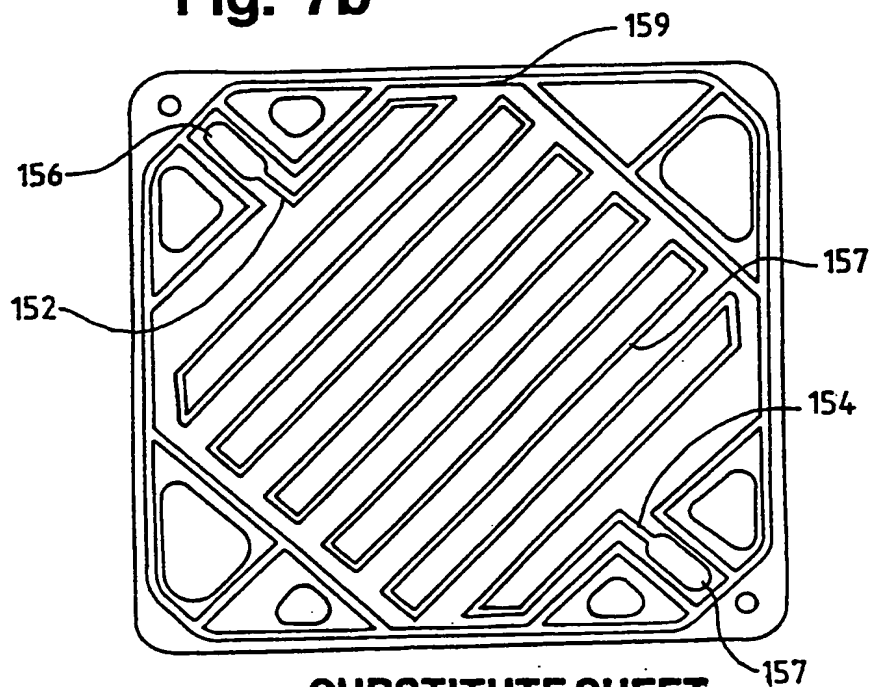

SUBSTITUTE SHEET


7/9

Fig. 8

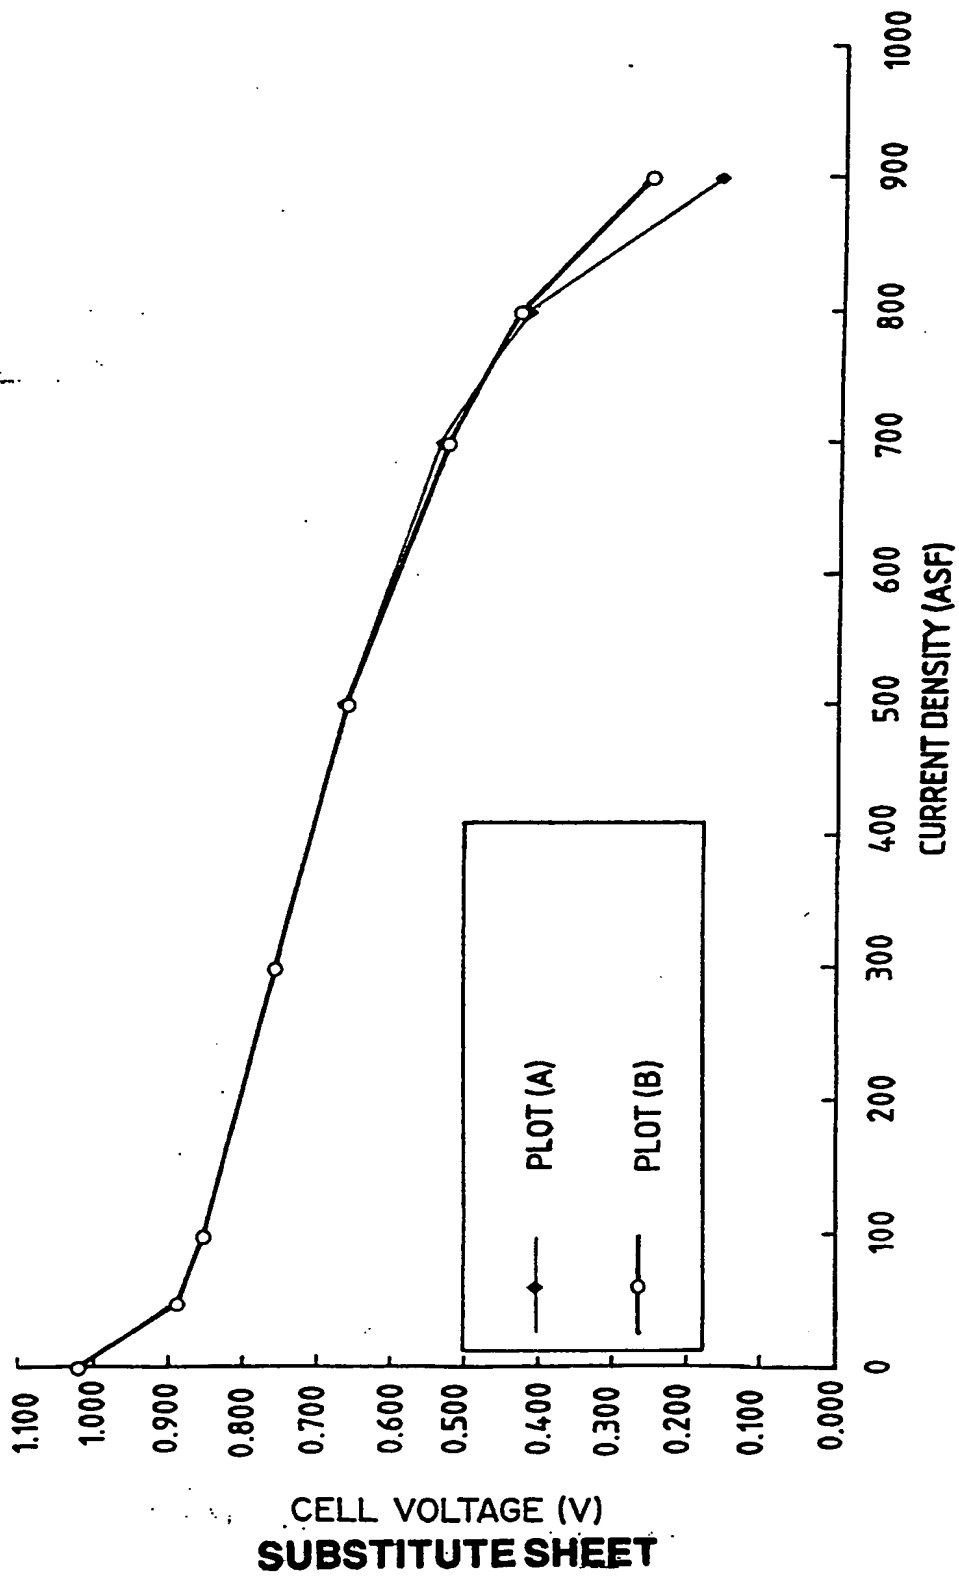


8/9

Fig. 9

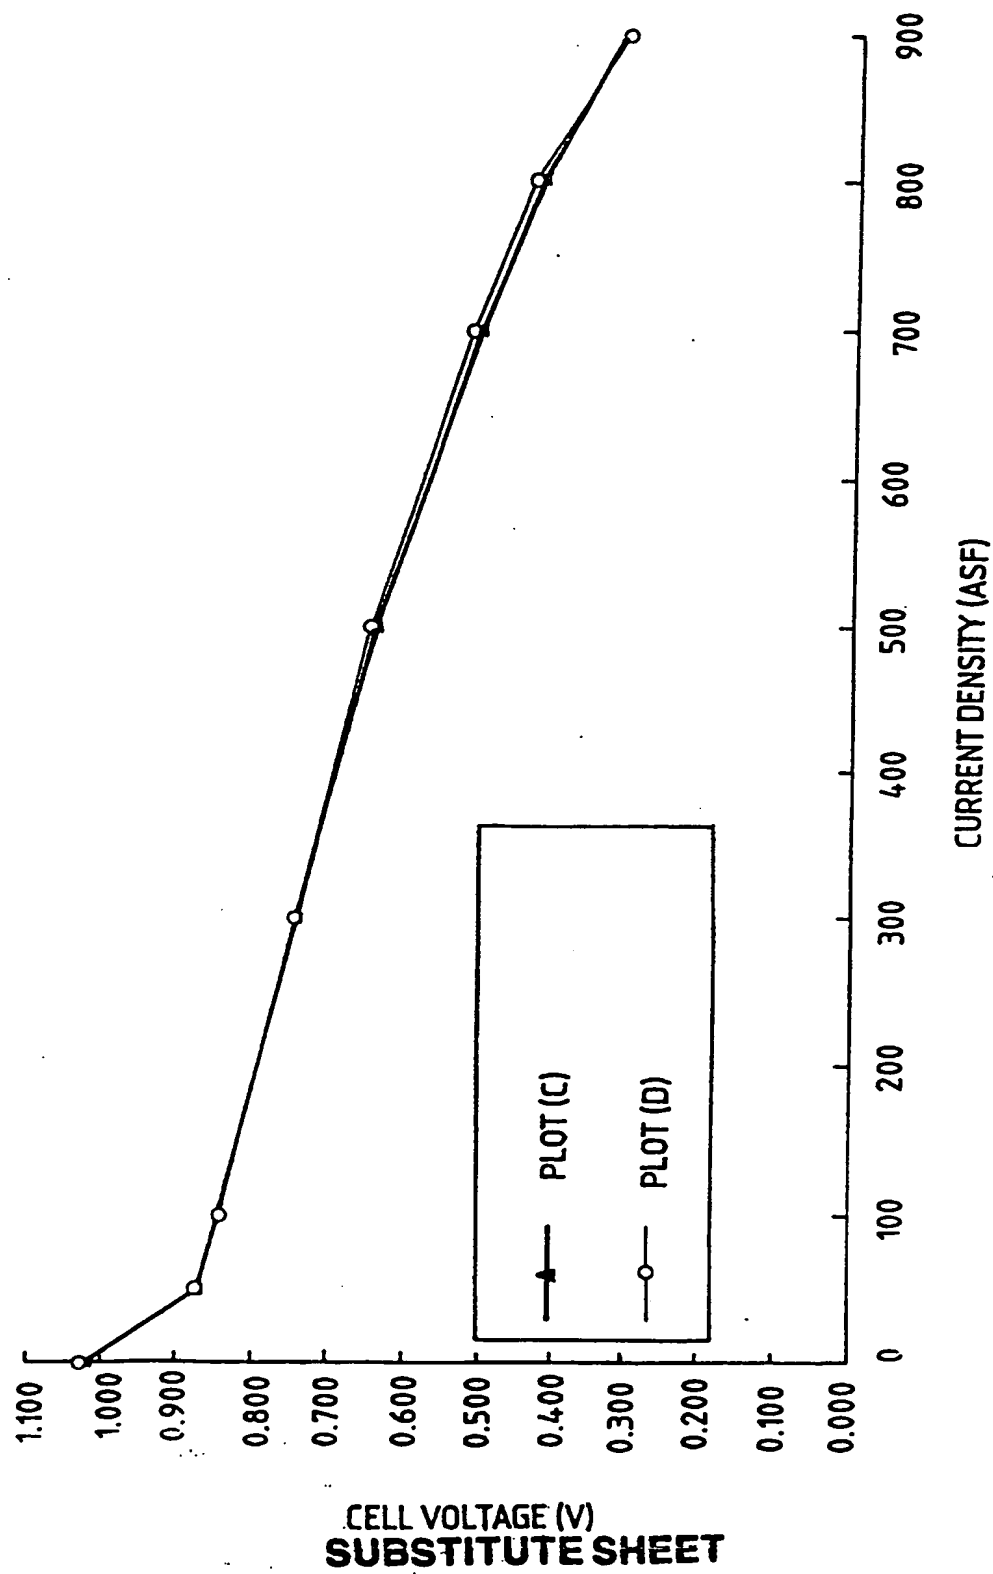

9/9

Fig. 10

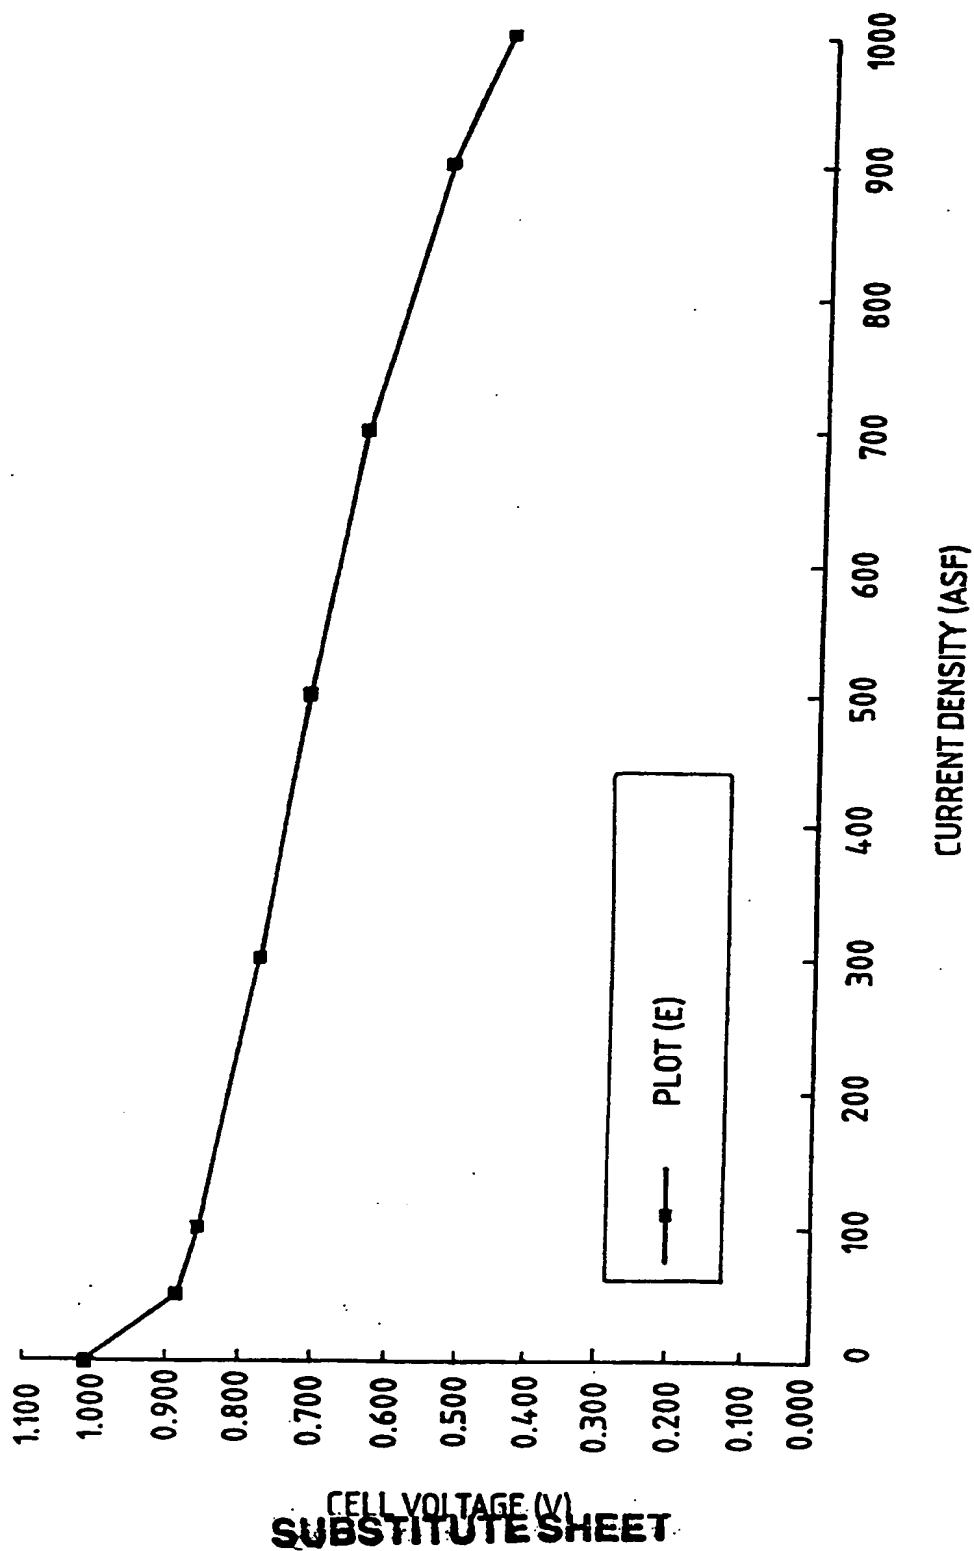

INTERNATIONAL SEARCH REPORT

International Application No
PCT/CA 94/00673

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H01M8/02 H01M8/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H01M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 010 no. 145 (E-407), 28 May 1986 & JP,A,61 007570 (HITACHI KASEI KOGYO KK) 14 January 1986, see abstract	1,5,77, 84,85
X	PATENT ABSTRACTS OF JAPAN vol. 010 no. 145 (E-407), 28 May 1986 & JP,A,61 007571 (HITACHI KASEI KOGYO KK) 14 January 1986, see abstract	1,5,77, 84,85

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

26 April 1995

Date of mailing of the international search report

09.05.95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

D'hondt, J

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 94/00673

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	WO,A,94 11912 (BALLARD POWER SYSTEMS) 26 May 1994 see page 20, line 25 - page 21, line 27 see page 23, line 8 - page 24, line 16; figure 8 see page 30, line 5 - line 34	1-7, 9-12,21
P,A	----	84-95
A	US,A,5 252 410 (WILKINSON DAVID P ET AL) 12 October 1993 see column 5, line 13 - line 41; claims 12,25,26; figures 5,11,12	1,2,7,9, 12,13
A	US,A,4 855 193 (MCELROY JAMES F) 8 August 1989 see column 2, line 55 - column 3, line 2; figure 2	1
A	US,A,3 755 000 (DEMANGE P) 28 August 1973 see abstract	1
A	US,A,5 176 966 (EPP DANNY G ET AL) 5 January 1993 see column 7, line 28 - line 49; figures 3,4 see column 8, line 11 - line 19 see column 8, line 48 - line 56	16
P,A	US,A,5 284 718 (CHOW CLARENCE Y ET AL) 8 February 1994 see column 3, line 35 - line 40; figure 9	83
A	WO,A,93 06627 (BALLARD POWER SYSTEMS INC) 1 April 1993 see page 15, line 20 - line 26; claim 1; figure 2A 4	16

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/CA 94/00673

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9411912	26-05-94	AU-B- 5415994 US-A- 5300370	08-06-94 05-04-94
US-A-5252410	12-10-93	WO-A- 9409519 AU-B- 3054092	28-04-94 09-05-94
US-A-4855193	08-08-89	NONE	
US-A-3755000	28-08-73	FR-A- 2116276 BE-A- 776160 DE-A- 2159350 GB-A- 1347300 NL-A- 7116544 SE-B- 371912	13-07-72 02-06-72 08-06-72 27-02-74 06-06-72 02-12-74
US-A-5176966	05-01-93	NONE	
US-A-5284718	08-02-94	WO-A- 9409520 AU-B- 3054192	28-04-94 09-05-94
WO-A-9306627	01-04-93	US-A- 5230966 AU-A- 2585592	27-07-93 27-04-93